


pH/O.R.P. probe



- For many different types of installations and applications
- Large selection of probe for a wide range of holder
- Useable for pipe DN15 to DN200

Type 8203 can be combined with...



Type 8200

Probe holder



Type 8200

Probe holder to install in Type S020 Fitting



Type 8619

multiCELL transmitter/controller



Type 8202

ELEMENT pH transmitter



Type 8202

ELEMENT neutrino pH transmitter

The pH or O.R.P. Bürkert sensor/transmitter is a modular device designed for the measurement of:

- the pH in clean liquids or liquids containing solids, sulphides or proteins.
- the oxidation-reduction potential in clean liquids or liquids containing solids, sulphides or proteins which may present low conductivity.

The probes of Type 8203 are available in various models:

- for pH
 - Type PLASTRODE pH 120 mm
 - Type FLATRODE pH 120 mm
 - Type LOGOTRODE pH 120 mm
 - Type UNITRODE PLUS pH 120 mm
 - Type CERATRODE pH 120 mm
 - Type FERMTRODE VP pH 120 mm
- for O.R.P.
 - Type FLATRODE O.R.P 120 mm
 - Type LOGOTRODE O.R.P 120 mm
 - Type UNITRODE PLUS O.R.P 120 mm

General data

Measuring range

Bürkert pH probe
Bürkert O.R.P. probe

0... 14 pH
-2000 mV... +2000 mV

Medium temperature

Temperature limits may depend on the inserted probe. Refer to the relevant instruction manual or technical data on next page. If the temperature ranges given for the holder and the inserted probe are different, use the most restrictive range.

Medium pressure

Pressure limits may depend on the inserted probe. Refer to the relevant instruction manual or technical data on next page. If the pressure ranges given for the holder and the inserted probe are different, use the most restrictive range.

Temperature compensation (option for pH measurement)

automatic (integrated Pt100 or Pt1000) or manual compensation reference temperature 25°C (77°F)

Electrical connection

Coaxial shielded cables with connector for pH/O.R.P. and 4-wire cable for Pt1000/Liquid earth rod

Electrical data

Output

Analog signal, to be connected to ELEMENT or ELEMENT neutrino pH/O.R.P. transmitter Type 8202 or multiCELL transmitter/controller Type 8619

Environment

Ambient temperature

Temperature limits may depend on the inserted probe. Refer to the relevant instruction manual or technical data on next page for more details

pH probe - specific technical data

Probe	PLASTRODE pH 120	FLATRODE pH 120	LOGOTRODE pH 120
Medium	- cost effective probe for drinking water, aquarium, swimming-pool...	- Contaminated (viscous, suspended solids, small sized solids, paints, cosmetics, foodstuffs)	- Clean (drinking water, cooling-water, aquarium, swimming-pool...)
Measuring range	0... 14 pH	0... 14 pH	0... 14 pH
Medium pressure	0 - 6 bar (0 - 87 PSI)	0 - 6 bar (0 - 87 PSI)	0 - 6 bar (0 - 87 PSI)
Medium temperature	-10°C to +40°C (14°F to 104°F)	0°C to +80°C (32°F to 176°F)	-10°C to +60°C (14°F to 140°F)
Ambient temperature			
Operation	0°C to +60°C (32°F to 140°F)	0°C to +60°C (32°F to 140°F)	0°C to +60°C (32°F to 140°F)
Storage	4°C to +30°C (39.2°F to 86°F)	4°C to +30°C (39.2°F to 86°F)	4°C to +30°C (39.2°F to 86°F)
Minimal conductivity	50 µS/cm	50 µS/cm	2 µS/cm
Max. pressure at max. temperature	6 bar (87 PSI)	4 bar (58 PSI)	6 bar (87 PSI)
No. of diaphragms	1	1	1
Diaphragm	"single pore™"	Annular and centered, in High Density Polyethylen	"single pore™"
Reference electrolyte	polymer	Acrylamide gel KNO ₃ /3.5M KCl-AgCl	polymer
EHEDG	No	No	No
Temperature sensor	No	No	No
Electrical connector	S7/S8	S7/S8	S7/S8

	UNITRODE PLUS pH 120	CERATRODE pH 120	FERMTRUDE pH 120
Medium	- Contaminated (waste water, cooling water, electroplating, paints, cosmetics...) - containing sulfides/proteins (tannery, animal breeding, waste water, foodstuffs, cosmetics, biotechnology)	- High pressure, high flowrate applications	biotechnology, pharma, food industry - containing proteins, cell cultures, injectable - applications requiring biocompatibility or suitability for food contact guarantee
Measuring range	0... 14 pH	0 ... 14 pH	0 ... 14 pH
Medium pressure	0 - 16 bar if medium temperature < +100°C (0 - 232 PSI if medium temperature < 212°F) 0 - 10 bar if medium temperature between 100°C and +130°C (0 - 145 PSI if medium temperature between 212°F and 266°F)	0 - 16 bar (0 - 232 PSI)	0 - 6 bar (0 - 87 PSI)
Medium temperature	0°C to +130°C (32°F to 266°F)	0°C to +130°C (32°F to 266°F)	0°C to +135°C (32°F to 275°F)
Ambient temperature			
Operation	0°C to +60°C (32°F to 140°F)	0°C to +60°C (32°F to 140°F)	0°C to +60°C (32°F to 140°F)
Storage	4°C to +30°C (39.2°F to 86°F)	4°C to +30°C (39.2°F to 86°F)	4°C to +30°C (39.2°F to 86°F)
Minimal conductivity	2 µS/cm	50 µS/cm	100 µS/cm
Max. pressure at max. temperature	6 bar (87 PSI)	6 bar (87 PSI)	6 bar (87 PSI)
No. of diaphragms	2	3	1
Diaphragm	"single pore™"	HP ceramics	HP-COATRAMIC
Reference electrolyte	polymer	gel	Pressurized FOODLYTE
EHEDG	No	No	Yes
Temperature sensor	No	No	Yes, Pt100
Electrical connector	S7/S8	S7/S8	VP 6.0 multipin connector

O.R.P. probe - specific technical data


Probe	FLATRODE O.R.P. 120	LOGOTRODE O.R.P. 120	UNITRODE PLUS O.R.P. 120
Medium	- Contaminated (viscous, suspended solids, small sized solids, paints, cosmetics, foodstuffs)	- Clean liquids (cooling-water, waste water or slightly contaminated) - with low conductivity (pure or rainwater...>2 $\mu\text{S/cm}$)	- Clean liquids (drinking water, aquarium, swimming-pool...) - Contaminated (waste water, cooling water, electroplating, paints...) - with low conductivity (pure or rainwater...>2 $\mu\text{S/cm}$) - containing sulfides/proteins (tannery, animal breeding, waste water, foodstuffs, cosmetics, biotechnology...)
Measuring range	-2000... +2000 mV	-2000... +2000 mV	-2000... +2000 mV
Medium pressure	0 - 6 bar (0 - 87 PSI)	0 - 6 bar (0 - 87 PSI)	0 - 16 bar if medium temperature < +100°C (0 - 232 PSI if medium temperature < 212°F) 0 - 10 bar if medium temperature between 100°C and +130°C (0 - 145 PSI if medium temperature between 212°F and 266°F)
Medium temperature	0°C to +80°C (32°F to 176°F)	-10°C to +60°C (14°F to 140°F)	0°C to +130°C (32°F to 266°F)
Ambient temperature			
Operation	0°C to +60°C (32°F to 140°F)	0°C to +60°C (32°F to 140°F)	0°C to +60°C (32°F to 140°F)
Storage	4°C to +30°C (39.2°F to 86°F)	4°C to +30°C (39.2°F to 86°F)	4°C to +30°C (39.2°F to 86°F)
Minimal conductivity	50 $\mu\text{S/cm}$	2 $\mu\text{S/cm}$	2 $\mu\text{S/cm}$
Max. pressure at max. temperature	4 bar (58 PSI)	6 bar (87 PSI)	6 bar (87 PSI)
No. of diaphragms	1	1	2
Diaphragm	Annular and centered, in High Density Polyethylen	"single pore™"	"single pore™"
Reference electrolyte	Acrylamide gel $\text{KNO}_3/3.5\text{M KCl-AgCl}$	polymer	polymer
EHEDG	No	No	No
Temperature sensor	No	No	No
Electrical connector	S7/S8	S7/S8	S7/S8

Principle of operation

The pH or redox probe built up on a glass membrane with variable sensitivity according to the pH or the redox, which must be screwed into the selected probe Holder Type 8200, connected to the e.g. transmitter/controller 8619. The probe with S7/S8 electrical connector can be screwed into the pH/O.R.P. ELEMENT transmitter 8202 (standard or neutrino version) too. The probe must be calibrated with buffer solution before the installation of the sensor into the pipe.

- ▶ When a pH probe is immersed into the solution a difference in potential is formed due to ions (H+) between the glass membrane and the solution. This difference in potential measured in relation to a reference electrode is directly proportional to the pH value (59.16 mV per pH unit at 25°C). The pH sensor can be calibrated in 1-point (Offset at pH 7) or in 2-points (Offset at pH 7 and Span at pH 4 or pH 10).
- ▶ When a redox probe is immersed into the solution an ion exchange occurs between the oxidised and the reduced state of an electrolyte. The generated cell voltage is the oxidation-reduction potential value. The O.R.P. sensor can only be calibrated in 1-point (Offset).

Installation of the sensor




The sensor or transmitter has to be installed with a maximum angle of 75 degrees against the vertical onto an horizontal pipe. Select and install the required fitting onto the pipe, according to specific requirements of the sensor and fitting material (temperature and pressure). After having connected the sensor to the Type 8619 (pH/O.R.P.) multiCELL transmitter/controller and having calibrated the unit, cautiously install the complete pH/O.R.P. sensor on the fitting.

In order to get reliable measurement air bubbles must be avoided.

Please ensure that the mounting location provides a continuous and complete immersion of the probe in the flow stream.

The probe must continuously be immersed into the measuring fluid in order to protect it from drying out. The transmitter must be protected from constant heat radiation and other environmental influences, such as direct exposure to sunlight.

Dimensions [mm]

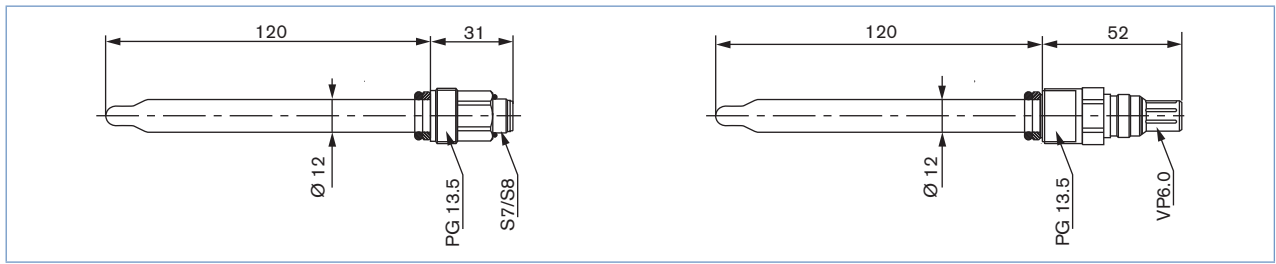

Ordering information for complete pH/O.R.P. sensor


A complete pH/O.R.P. sensor consists of a pH or O.R.P. probe Type 8203, a Pt1000/liquid earth rod (option), a probes holder Type 8200 with seals, a pH/O.R.P. shielded cable, a Pt1000/liquid earth rod shielded cable (option).

The following information is necessary for the selection of a complete device:

- Item no. of the desired probes holder **Type 8200** (see separate data sheet) [More info.](#)
- Item no. of the selected pH or O.R.P. probe **Type 8203** (see ordering chart, p. 5)
- Item no. of the Pt1000/liquid earth rod, if needed (see ordering chart, p.5)
- Item no. of the pH/O.R.P. shielded cable (see ordering chart, p.5)
- Item no. of the Pt1000/liquid earth rod shielded cable, if needed (see ordering chart, p.5)

When you click on the orange box "More info," you will come to our website for the resp. product where you can download the data sheet.

→ You have to order the components separately.

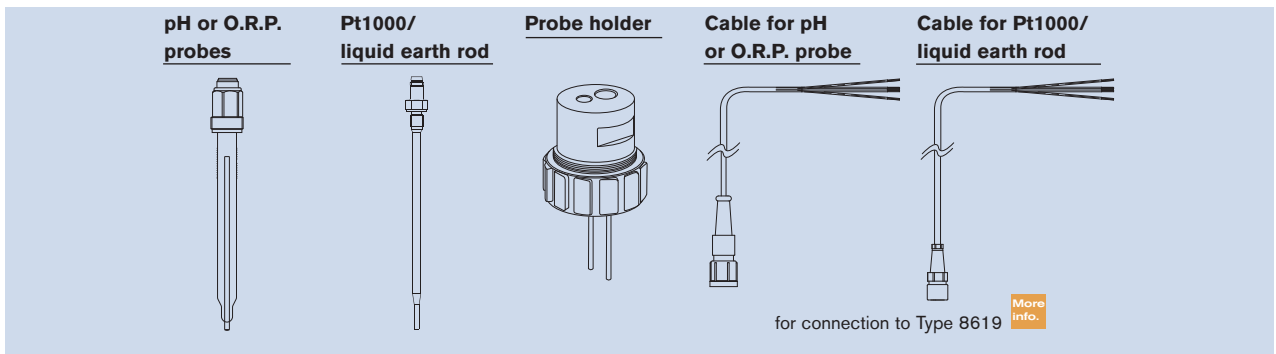

Ordering information for complete pH/O.R.P. transmitter


A complete pH/O.R.P. transmitter consists of a replaceable standard 120 mm pH or O.R.P. probe Type 8203 and a pH or O.R.P. transmitter Type 8202.

The following information is necessary for the selection of a complete device:

- Item no. of the selected pH or O.R.P. probe **Type 8203** (see ordering chart, p. 5)
- Item no. of the selected pH/O.R.P. transmitter **Type 8202** (see separate data sheet) [More info.](#)

When you click on the orange box "More info," you will come to our website for the resp. product where you can download the data sheet.

→ You have to order the components separately.

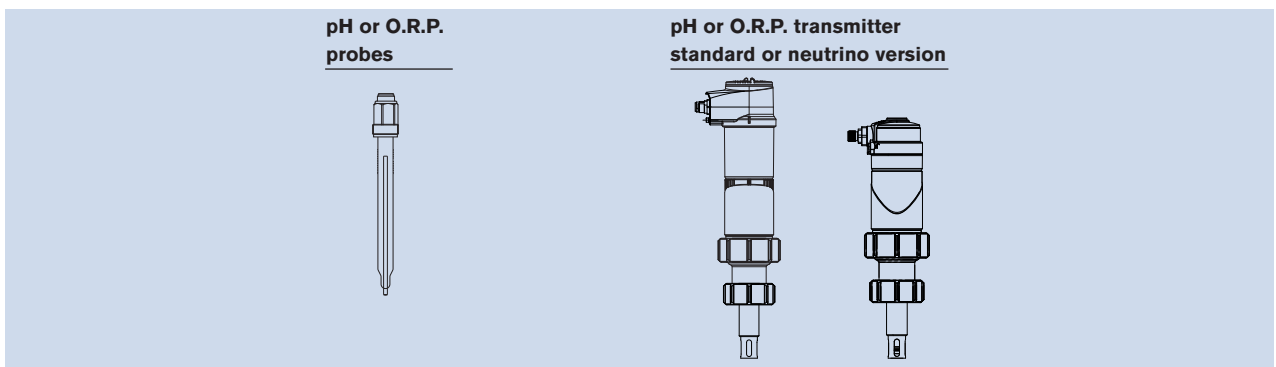

Ordering chart for probe

Probe	Description	Item no.
PLASTRODE pH 120 mm	pH probe -10... 40°C, 0... 6 bar, pH 0... 14	560 377
FLATRODE pH 120 mm	pH probe 0... 80°C, 0... 6 bar, pH 0... 14	561 025
LOGOTRODE pH 120 mm	pH probe -10... 60°C, 0... 6 bar, pH 0... 14	427 114
UNITRODE PLUS pH 120 mm	pH probe 0... 130°C, 0... 6 bar, pH 0... 14	560 376
CERATRODE pH 120 mm	pH probe 0... 130°C, 0... 16 bar, pH 0... 14	418 319
FERMTRODE pH 120 mm	pH probe 0... 135°C, 0... 6 bar, pH 0... 14	561 727

Probe	Description	Item no.
FLATRODE O.R.P. 120 mm	O.R.P. probe 0... 80°C, 0... 6 bar, -2000... +2000 mV	561 027
LOGOTRODE O.R.P. 120 mm	O.R.P. probe -10... 60°C, 0... 6 bar, -2000... +2000 mV	560 379
UNITRODE PLUS O.R.P. 120 mm	O.R.P. probe 0... 130°C, 0... 6 bar, -2000... +2000 mV	560 378

Probe	Description	Item no.
Temperature probe	Pt1000/liquid earth rod - in stainless steel	427 023
Temperature probe	Pt1000/liquid earth rod - in titanium	560 317


Ordering chart for cables for probes

Description	Item no.
pH/O.R.P. coaxial cable with standard probe plug - 3 m (for connection between 8619 transmitter and pH/O.R.P. probe mounting into Type 8200)	561 904
pH/O.R.P. coaxial cable with standard probe plug - 5 m (for connection between 8619 transmitter and pH/O.R.P. probe mounting into Type 8200)	561 905
pH/O.R.P. coaxial cable with standard probe plug - 10 m (for connection between 8619 transmitter and pH/O.R.P. probe mounting into Type 8200)	561 906
Pt1000/liquid earth rod 4-wire cable with M8 connector - 2 m (for connection between 8619 transmitter and Pt1000/liquid earth rod mounting into Type 8200)	427 110
Pt1000/liquid earth rod 4-wire cable with M8 connector - 3 m (for connection between 8619 transmitter and Pt1000/liquid earth rod mounting into Type 8200)	561 907
Pt1000/liquid earth rod 4-wire cable with M8 connector - 5 m (for connection between 8619 transmitter and Pt1000/liquid earth rod mounting into Type 8200)	427 113
Pt1000/liquid earth rod 4-wire cable with M8 connector - 10 m (for connection between 8619 transmitter and Pt1000/liquid earth rod mounting into Type 8200)	554 822
Pt1000/liquid earth rod 4-wire cable with plug-in connector - 5 m (for connection between 8619 transmitter and Pt1000/liquid earth rod mounting into the immersion fitting Type 8200)	562 627
Pt1000/liquid earth rod 4-wire cable with plug-in connector - 10 m (for connection between 8619 transmitter and Pt1000/liquid earth rod mounting into the immersion fitting Type 8200)	562 628

Ordering chart for accessories

Description	Item no.
Storage solution for probe (KCl 3M), 500 ml	418 557
Cleaning solution set for probe, 3 x 500 ml	560 949
Buffer solution, 500 ml, pH = 4.01	418 540
Buffer solution, 500 ml, pH = 7	418 541
Buffer solution, 500 ml, pH = 10.01	418 543
Buffer solution, 500 ml, O.R.P. = 475 mV	418 555
Factory 2-point pH calibration certificate	550 673
Factory 1-point O.R.P. calibration certificate	550 674

Interconnection possibilities with other Bürkert devices

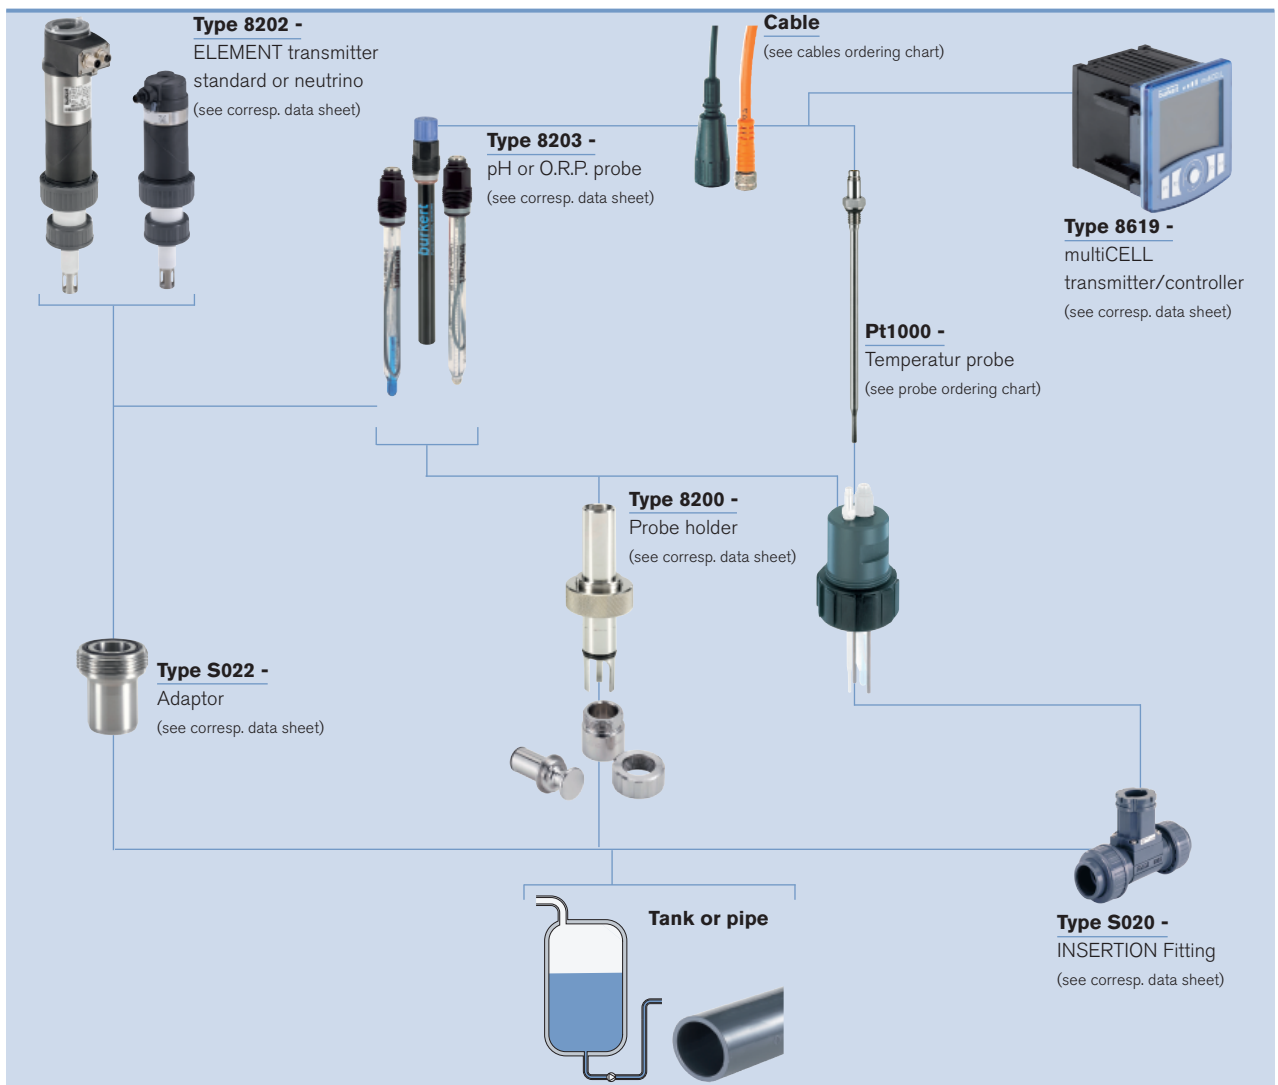

To find your nearest Bürkert facility, click on the orange box →

www.burkert.com

In case of special application conditions,
please consult for advice.

Subject to alteration.
© Christian Bürkert GmbH & Co. KG

1203/3_EU-en_00895193